


DGH DYG socket

- Sleeve with an internal screw thread and including / excluding a nailing flange.
- For the installation of anchor rods (size DG 15).
- Plug as a thread protection.

article no.	designation	for tie rod	length (cm)	units / bag	units / sac
311501	DGH 15 excluding flange	15	12	50	200
311500	DGH 15 including flange	15	12	50	200
311502	DGS 15 plug	15		50	1.000

Test certificate upon request.

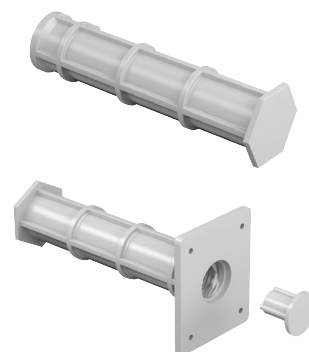

PN Plastic nail

- For securing insulation boards.


article no.	designation	length (mm)	for board thickness (mm)	pcs. / sac	pcs. / pallet
3741	PN 60	60	to 20	8.000	112.000
3742	PN 75	75	to 25	6.000	84.000
3743	PN 100	100	off 25	3.500	49.000
3744	PN 125	125	off 50	500	68.000
3745	PN 150	150	off 75	500	52.000
3759	PN 200	200	off 125	300	20.400
3767	PN 235	235	off 160	250	7.500
3769	PN 250	250	off 175	250	7.500
3770	PN 275	275	off 200	250	7.500
3771	PN 300	300	off 225	250	5.000



DSD Insulation nail

- Excluding nail pin, made of high impact resistant plastic, for hard insulating materials.
- 8 mm bore, plate diameter 90 mm.
- Suitable for concrete, solid brick, and gypsum.

article no.	designation	dowel Ø (mm)	length (mm)	for insulation thickness (mm)	pcs. / box
3761	DSD 8 x 80	8	80	30 - 50	250
3747	DSD 8 x 100	8	100	60 - 70	250
3748	DSD 8 x 120	8	120	80 - 90	250
3749	DSD 8 x 140	8	140	100 - 110	250
3750	DSD 8 x 160	8	160	120 - 130	250



IPD Insulating board dowel

- Including pin, also suited for use on subsoil of low bearing capacity.
- 10 mm bore, 60 mm plate diameter.
- Suitable for concrete, natural stone, solid brick, and many other construction materials of medium to high strength.

article no.	designation	dowel Ø (mm)	length (mm)	for insulation thickness (mm)	pcs. / box
3751	IPD 10 x 90	10	90	40 - 50	250
3752	IPD 10 x 110	10	110	60 - 70	250
3753	IPD 10 x 130	10	130	80 - 90	250
3754	IPD 10 x 150	10	150	100 - 110	250
3762	IPD 10 x 160	10	160	110 - 120	250
3746	IPD 10 x 210	10	210	120 - 130	100

